

ELAN EL-800-IWLCR-6



800 Series LCR In-Wall Speakers

(Sold Individually)



Exceptional Clarity, Power and Dynamics

For both high-performance distributed audio and exceptional home theater performance, the EL-800-IWLCR-6 is the perfect choice for discerning customers. Better clarity, resolution and dynamics are achieved via a graphite-injected polypropylene cone woofer and the 1" aluminum dome tweeter. The EL-800-IWLCR-6 is the perfect left, center, right home theater speaker. Increased vocal clarity, enhanced dialogue and adjustment of post-installation tweeter performance are enabled with the front-mounted vocal and tweeter enhancement switches.



EL-800-IWLCR-6 In-Wall Speakers

ORDER NO. EL-800-IWLCR-6

800

SERIES

▪ Dynamic Room Filling Sound

Low Crossover points and a light-weight graphite injected polypropylene cone woofer that's mounted as close to the surface as possible delivers dynamic sound with the widest dispersion possible.

▪ Quick, Responsive Highs

Aluminum dome tweeters are lightweight, strong and respond instantaneously to changes in music or movies.

▪ Tilt Tweeter

The tilting tweeter mechanism allows you to direct sound to the listening area and maintains high frequency performance even when the speaker is mounted in less than ideal locations.

▪ Vocal and Tweeter Enhancement Switches

Easily adjust tweeter performance or enhance the dialogue in movies via the Vocal and Tweeter Enhancement Switches.

▪ Thin is In

A thin-bezel magnetic grille ensures a secure fit, pleasing aesthetic and with a one-step paint process, it fits universally into almost any décor.


▪ Secure Connection

All ELAN speakers feature spring loaded binding posts that provide a secure, worry-free connection in the wall or ceiling.

▪ Lifetime Warranty

Feel confident that all ELAN architectural speakers are backed by a limited lifetime warranty.

SPECIFICATIONS	
Woofer Size	6-1/2" (160mm)
Woofer Construction	Graphite Injected Polypropylene Cone
Tweeter	1" (25 mm) Silk Dome
Frequency Response	47Hz-20kHz
Impedance	8 Ohms
Power Handling	120 Watts
Sensitivity	91 dB
Timbre	Timbre-Matched to all 800 Series Speakers
Dimensions	15.6" (396mm) Width x 11" (280mm) Height x 3.3" (85 mm) Depth
Hole Cutout Dimensions	7.5" (190.5mm) Width x 14.5" (369mm) Height
Mounting Depth	3.2" (82mm)

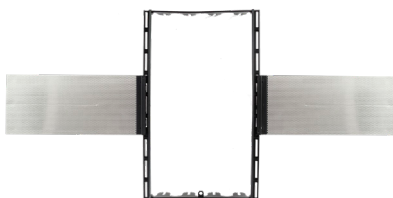

Use Pre-Construction Bracket

EL-PCB-IWLCR-6



ELAN[®]
Your world, made simple.™

www.elanhomesystems.com